

RADAR Emissions: Experimental Assessment of Workers' Electromagnetic Exposure in the Italian Coast Guard

Giancarlo Burriesci (1), Moreno Comelli (2), Nicola Zoppetti (2), Simona D'Agostino (1-3), Marco Valentini (1)

(1) Department of Occupational and Environmental Medicine, Epidemiology and Hygiene, Italian National Institute for Insurance against Accidents at Work, Rome, Italy

(2) Institute of Applied Physics "Nello Carrara" (CNR-IFAC), Florence, Italy

(3) DIET, Department of Information Engineering, Electronics and Telecommunications, Sapienza University of Rome, Italy

Introduction

The present work is the result of a measurement campaign aimed at assessing the exposure to electromagnetic fields (EMF) generated by radar equipment, present on some vessels in use by the Italian Harbour Master's Office. Specifically, the radars were mounted in the G.C. B120 boats of the Rome harbourmaster's office and the C.P. 2096 boat of the Vibo Valentia harbourmaster's office. Radars (Radio Detection and Ranging) are instruments used for locating objects even at great distances. They work in the microwave frequency range, generally in the X-band, and their operation is based on the emission of a train of short-duration pulses. Between one pulse and the next, the transmitter/receiver system listens for return echoes. Targets are located by directional radiation of high electromagnetic energy and by observing return echoes, which provide their distance and position relative to a given direction. Specifically, EMF generated by Furuno DRS4D-NXT radar equipment and a Lorentz radar Plotter antenna type mod. MDS-9 emitting in X-band were examined for this project. The complexity of the emitted signals required the use of very sophisticated equipment with narrow-band evaluations. Equally complex was also the measurement protocol followed, which had to consider several parameters. The procedure described in this paper is intended to serve as a practical example for measurements in the field.

Regulatory references

Health and safety requirements for workers exposed to EMF are established in Dir 2013/35/EU [1]. Among other prominent features, this directive sets exposure limits (ELVs) and, above all, action levels (ALs). Specifically, annexes II and III list all the values of ALs for exposure to electric fields from 1 Hz to 10 MHz and from 100 kHz to 300 GHz that are required as reference levels for measurements, to show compliance with the relevant ELVs, during experimental testing. ELVs are determined on the basis of biophysical and biological considerations, which cannot be measured in the exposure environment, established for the protection of scientifically established acute effects, i.e., thermal effects and electrical stimulation of nerve or muscle tissue. Consequently, compliance with ELVs, the direct determination of which, especially in the case of time-varying fields, would require complex assessments using dedicated software, is ensured by compliance with the relevant VAs.

It should be remembered that the rationale of the Directive bases many of its indications on the International Commission on Non-Ionizing Radiation Protection (ICNIRP) guidelines [2]. Only the ALs used for the evaluation of EMF emissions produced by the investigated radars are shown in Table 1:

Table 1 – ALs for exposure to electric and magnetic fields from 100 kHz to 300 GHz
Table B1 of Annex III - DIRECTIVE 2013/35/EU

Frequency range	RMS Electric field ALs(E) (V/m)	RMS Magnetic flux density ALs(B) (μ T)	Power density ALs(S) (Wm ⁻²)
100 kHz \leq f < 1 MHz	6.1×10^2	$2.0 \times 10^6/f$	—
1 MHz \leq f < 10 MHz	$6.1 \times 10^8/f$	$2.0 \times 10^6/f$	—
10 MHz \leq f < 400 MHz	61	0.2	—
400 MHz \leq f < 2 GHz	$3 \times 10^{-3} f^{1/2}$	$1.0 \times 10^{-5} f^{1/2}$	—
2 GHz \leq f < 6 GHz	1.4×10^2	4.5×10^{-1}	—
6 GHz \leq f \leq 300 GHz	1.4×10^2	4.5×10^{-1}	50

Note B1-1: f is the frequency expressed in hertz (Hz).

Note B1-2: [ALs(E)]² and [ALs(B)]² are to be averaged over a six-minute period. For RF pulses, the peak power density averaged over the pulse width shall not exceed 1,000 times the respective ALs(S) value. For multi-frequency fields, the analysis shall be based on summation, as explained in the practical guides referred to in Article 14.

Note B1-3: ALs(E) and ALs(B) represent maximum calculated or measured values at the workers' body position. This results in a conservative exposure assessment and automatic compliance with ELVs in all non-uniform exposure conditions. In order to simplify the assessment of compliance with ELVs, carried out in accordance with Article 4, under specific non-uniform conditions, criteria for the spatial averaging of measured fields based on established dosimetry will be laid down in the practical guides referred to in Article 14. In the case of a very localised source within a distance of a few centimetres from the body, compliance with ELVs shall be figured out dosimetrically, case by case.

Note B1-4: The power density shall be averaged over any 20 cm² of exposed area. Spatial maximum power densities averaged over 1 cm² should not exceed 20 times the value of 50 Wm⁻². Power densities from 6 to 10 GHz are to be averaged over any six-minute period. Above 10 GHz, the power density shall be averaged over any $68/f^{1.05}$ - minute period (f is the frequency expressed in GHz) to compensate for progressively shorter penetration depth as the frequency increases.

The emissions of the radars examined are of the X-band impulse type at frequencies of around 9.4 GHz for both devices. Therefore, the evaluation of the fields must include both the calculation of the average electric

field (V_{average}) and the calculation of the peak electric field (E_{peak}), whose action values, based on Note 2 to Table 1, are respectively:

- $ALs_{\text{average}} = 140 \text{ V/m}$
- $ALs_{\text{peak}} = 4480 \text{ V/m}$

Methods

For the evaluation of the radars examined, we used many of the operational indications found in CEI 211-7/B (2016-05) Appendix B [3] and in the publications ‘Misura sul Radar Meteorologico di Gattatico (Reggio Emilia)’ [4] and ‘Sorveglianza Fisica di installazioni Radar’ [5].

Devices examined:

Radar Furuno DRS4D-NXT (9.41 GHz \pm 30 MHz) – Peak power output 25W;

Lorentz radar Plotter antenna type mod. MDS-9 (9.41 GHz \pm 30 MHz) – Peak power output 4kW.

Instruments used for exposure assessment:

Measuring chain 1

- Rohde & Schwarz mod. FSL 18 (9 kHz – 18 GHz) spectrum analyser;
- Antennas Horn double ridged guide EMCO mod. 3115 (1 GHz - 18 GHz);
- Coaxial cable 1.

Measuring chain 2

- Agilent ESA 7704 B (1 GHz - 18 GHz) spectrum analyser;
- Antennas Schwarzbeck mod. BHA 9120 D (6 GHz– 18 GHz);
- Coaxial cable 2.

The choice of spectrum analysers had to take into account the specific parameters and especially the Resolution Bandwidth (RBW).

An optimal RBW allows both to evaluate the time width of the radar pulse and to determine its peak emission power. In fact, measuring in the mode generally referred to as pulse spectrum and choosing a sufficiently small RBW provides an accurate measurement of the pulse duration. Conversely, by having a rather large RBW, an accurate measurement of the peak power emitted by the radar is obtained. The evaluations were carried out using two narrow-band instrumental chains each consisting of the spectrum analyser coupled via coaxial cable to the antenna. The latter was placed at the locations occupied by the crew at such a distance that the far-field

condition is verified. The physical quantity under evaluation was the electric field E (RMS value, and peak value in the case of radar signals).

For this type of measurement, the power values, expressed in dBm and evaluated by means of the spectrum analyser, in order to be compared with the respective action limits, must be converted by means of the following equation into electric field values (V/m):

$$ALs \left(\frac{V}{m} \right) = 10^{\frac{E_{peak}(dBm) + AF + AC - 13}{20}}$$


where AF and AC are the values in dB related to antenna factor and cable attenuation. Respectively 38.8 and 7.3 for while Rohde & Schwarz spectrum analyser and Antennas EMCO, and for Agilent spectrum analyser and Antenna Schwarzbeck are 38.1 and 6.21. The conversion coefficient is 13.

An error of not less than 10 percent is associated with the measurements, assigned on the basis of assessments of repeatability of the measured signal.

Results and Discussions


To characterise radar emission, the positions intercepting the radiation beam were identified so that the measurement represents the worst case and therefore returns a precautionary value. Figure 1 shows a general radar radiation emission beam.

Figure 1 – Radar emission lobes

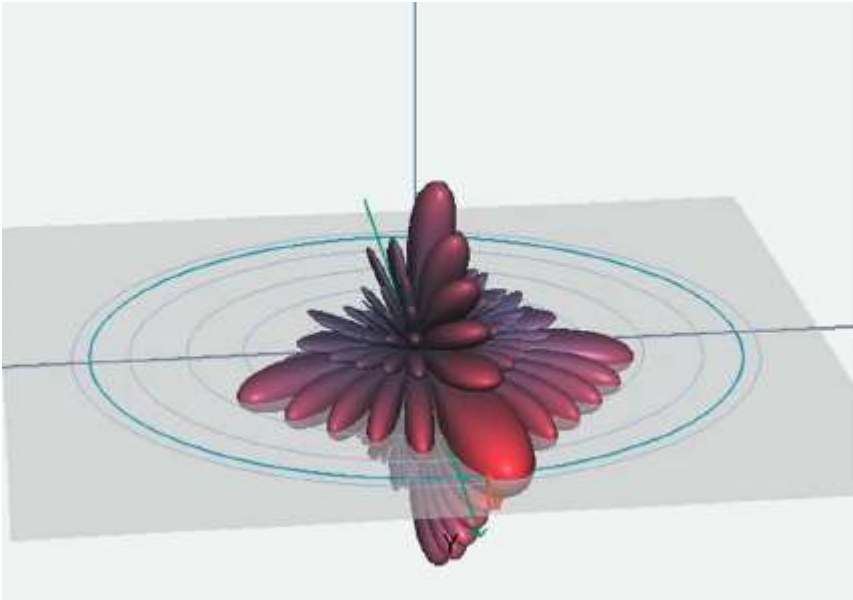

The Furuno radar, emitting at a frequency of $9.41 \text{ GHz} \pm 30 \text{ MHz}$, was set during the measurements in the range of 12 nautical miles and with an antenna rotation speed of 24 rotations per minute (rpm). The antenna of the measurement chain was positioned (Figure 2a) close to the bridge at a height of 1.8 m and at 2.5 m, which, although difficult for a person to occupy, better intercepts the beam emitted by the radar (worst case).

Figure 2 Boat G.C. B120 (a) - Boat CP. 2096 (b)

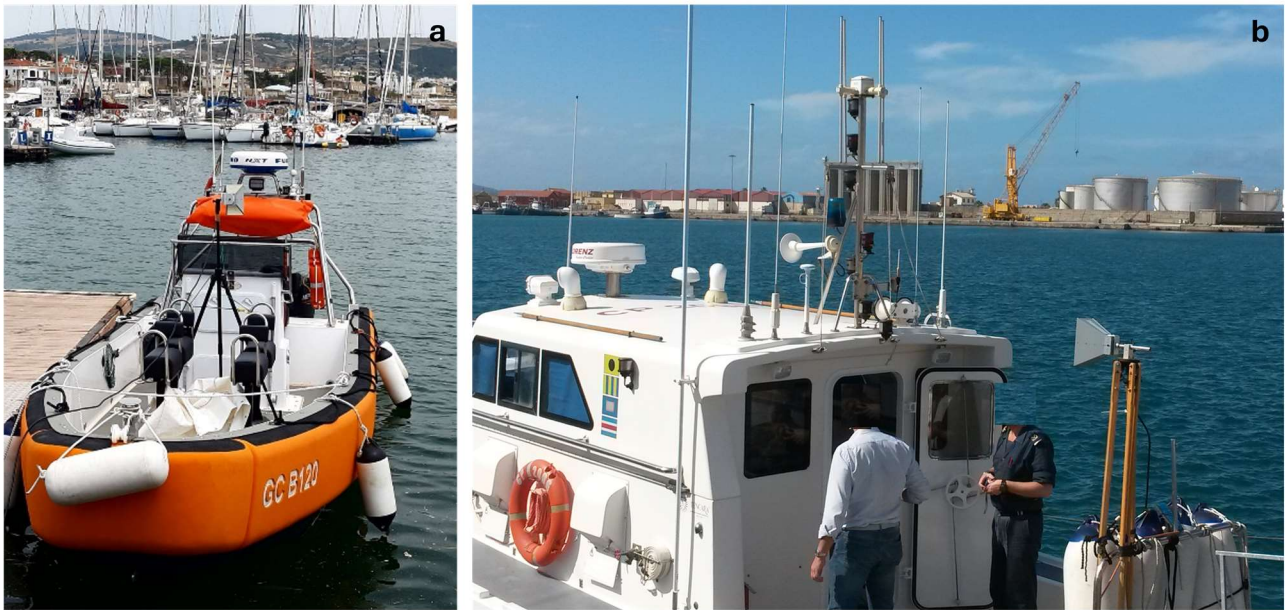

Measurements aboard the CP2096 boat were conducted at two different distances towards the prow, two meters and four meters, whereas towards the stern only at the distance of 5.7 m (Figure 2b). The latter choice is due to the circumstance that towards the stern there is the wide roof of the cockpit that shields from the electromagnetic waves. For all measurements, the radar was set to the range of sixteen nautical miles because previous measurements showed that the maximum range available on the instrument corresponds with the highest electromagnetic field emitted. Even in this case the antenna rotation speed of the emitter was 24 rpm, and the positioning of the antenna receiver represents the worst case of exposure.

The results of the measurements are shown in Table 2. Figure 3a and 3b show the peak power and average power measurements in channel power mode for the Furuno radar. In the latter mode, the RMS value of the field produced by the radar at the measurement point is measured directly, considering antenna rotation and duty cycle. In fact, with an RBW small enough to discriminate the frequency components of the signal, the signal power within the frequency band (Integration Bandwidth) is calculated by evaluating it in such a way that it contains at least three or four secondary lobes to the right and left of the main scan lobe (Figure 3a).


As far as the peak power measurement is concerned, the envelope height increases as the RBW increases, but this effect lasts until the width of the main lobe is exceeded. Once this condition is reached and an RBW is set that also includes the two secondary lobes, the amplitude of the signal peak is equal to approximately 95% of the energy emitted by the source. In this case, in order to obtain an accurate measurement of the peak power, the measurements must be extended, in MaxHold or Average mode, for a sufficiently long scan time so that each video point is illuminated at least once by the rotating radar beam.

As can be seen, the results show that the peak value of ALs is at least an order of magnitude higher than the mean value of ALs. This circumstance led to the choice of measuring ALs peak values rather than average values also because such measurements require long sampling times, at least 45 minutes.

Table 2 - EMF exposure values emitted by the Furuno DRS4D-NXT radar and the Lorenz Radar

Radar Furuno - narrow-band electric field measurements - Measuring chain 1						
Measuring point	ALs average (dBm)	Als average (V/m)	Limit average Dir 2013/35/EU (V/m)	Als peak (dBm)	Als peak (V/m)	Limit peak Dir 2013/35/EU (V/m)
Stern	-43.81	0.29	140	-6.70	20.9	4480
Radar Lorenz - narrow-band electric field measurements - Measuring chain 2						
Measuring point	ALs average (dBm)	Als average (V/m)	Limit average Dir 2013/35/EU (V/m)	Als peak (dBm)	Als peak (V/m)	Limit peak Dir 2013/35/EU (V/m)
Stern	----	----	140	24.45	613.7	4480
Prow 2m	----	----	140	29.89	1148.15	4480
Prow 4m	-25.97	1.84	140	25.32	678.422	4480

Figure 3 - Peak Power Measurement (a) - Average Power-Channel Power Mode (b)

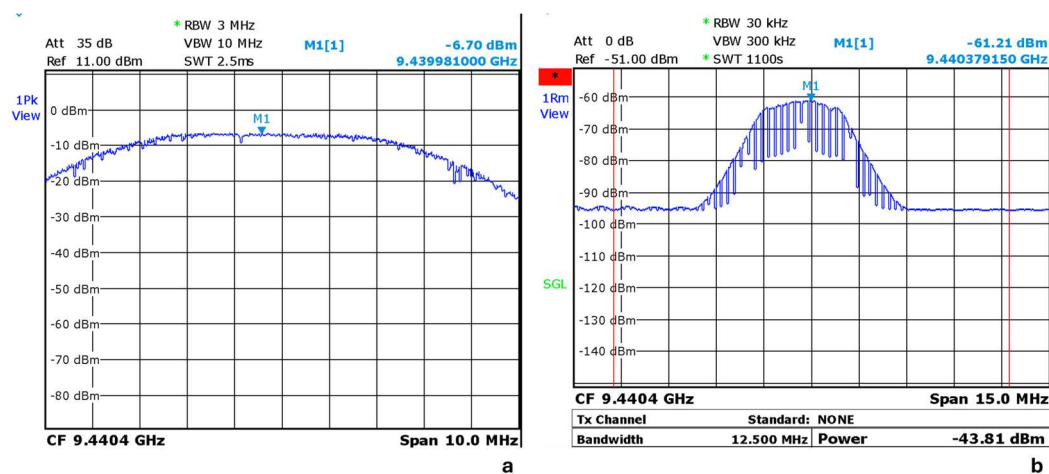

Conclusions

The surveys carried out on both boats G.C. B120 and CP. 2096 to assess, respectively, the emission of the Furuno DRS4D-NXT and Lorentz radar Plotter antenna type mod. MDS-9 radars, showed electromagnetic field values lower than the action values envisaged by 2013/35/EU for occupational exposure, both considering the peak electric field and the mean field.

It should be noted that although the Lorentz radar's emissions are compliant, they are much higher than those emitted by Furuno radar; this could be due to the different peak power output, as reported in Devices Examined.

However, considering that radar equipment is increasingly widespread, with different technical characteristics, and installed even in small vessels, this evaluation can only be considered a first step in the study of such emissions. In fact, these devices emit complex signals that require sophisticated instruments and highly qualified personnel for their correct evaluation. Although the purpose of this work was to assess workers exposure, the installation of radars even on small vessels can also subject individuals in the population who use these means of transport to overexposure. Currently, some manufacturers are placing small instruments on the market with specially designed probes to evaluate these types of signals. For these reasons, the evaluation of these types of sources requires targeted studies to validate the effectiveness of these instruments and the possible exposure of non-boat personnel (population).

References

- [1] European Union, “Directive No. 2013/35/EU, of 26 June 2013, on the minimum health and safety requirements regarding the exposure of workers to the risks arising from physical agents (electromagnetic fields),” Off. J. Eur. Union, vol. L179, no. June, pp. 1–21, 2013
- [2] ICNIRP (International Commission on Non-Ionizing Radiation Protection) (1998). “Guidelines for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (Up to 300 GHz)”. Health Physics, Vol. 74, N. 4.
- [3] CEI 211-7/B (2016-05) Appendice B: Misura e valutazione del campo elettromagnetico emesso dagli impianti radar di potenza.
- [4] M. Bini, A. Ignesti, C. Riminesi: “Misure sul Radar Meteorologico di Gattatico (Reggio Emilia)” Technical, Scientific and Research reports Vol. 2 – n. 65-6 (2010), CNRIFAC TR-06-1/009;
- [5] D. Andreuccetti, M. Bini, A. Ignesti, R. Olmi, R. Vanni: “Sorveglianza Fisica di installazioni Radar” Report N. EP/AO-I13 giugno 1988 CNR-IROE